


LED Flood light

- CREE LED light source
- die-casting aluminum house
- RGB DMX Control mode

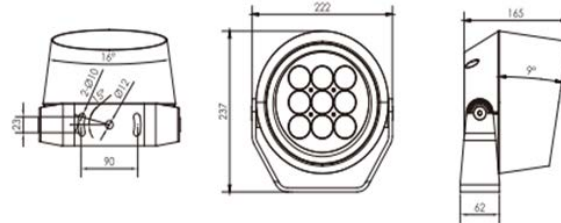

Performance

| | |
|---------------------------|--------------------|
| System Power | 41W |
| Exit Lumen | 2665lm |
| Lm/W | 67lm/W |
| CCT | 3000K |
| CRI | 90 |
| Operating Temperature | 0 - 50°C |
| Beam angle | 10*70°/5*20° |
| IK rating | IK08 |
| Ingress Protection Rating | IP66 |
| Warranty | 5 Years |
| Lifetime | 100,000hrs at 25°C |

Physical

| | |
|-----------------|---|
| Dimensions | D222 x 237H |
| Diffuser | Clear Tempered Glass |
| Housing | Die-cast aluminum with anti glare honeycomb |
| Weight | 3.6kg |
| Driver Location | Built-in |
| Finish | Anodised Silver |
| Installation | Surface Mounted |

Electrical

| | |
|-------------------------|----------|
| Dimming | DALI |
| Voltage | 100-240V |
| Inrush Current | N/A |
| Inrush Current Duration | N/A |
| Electrical Rating | Class 1 |