

# LIKO OMEGA/ ECO LED FLOODLIGHT


## 25W, 50W & 70W



Order Code	LIKO Omega K-25W	LIKO Omega K-50W	LIKO Omega K-70W
Wattage	25W	50W	70W
Lumen	1600 lm	3600 lm	5100 lm
Dimension	170 (222)×148×39	280 (325)×244×61	340 (397)×295×68
Colour Temperature	3000K- 5700K	3000K- 5700K	3000K- 5700K
IP Rating	IP65	IP65	IP65
CRI	>80	>80	>80
Operating Temperature	-30°C ~ +40°C	-30°C ~ +40°C	-30°C ~ +40°C
Weight	0.6 kg	1.5 kg	2.5 kg
Material	Die-cast aluminium finished with durable polyester epoxy powder coating, Akzo Nobel RAL 9006		
Diffuser	Anti glare high transparency frosted tempered glass		


Luminous Flux:  
K-25W-1200lm (3000K)  
K-25W-1600lm (5700K)

LIKO Omega K-25W Floodlight


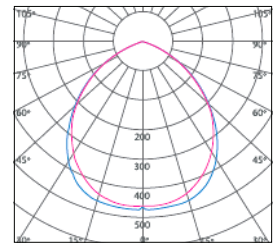


Luminous Flux:  
K-50W-2700lm (3000K)  
K-50W-3600lm (5700K)

LIKO Omega K-50W Floodlight

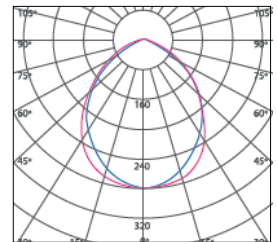

Typical Luminous Flux:  
K-70W-3800lm (3000K)  
K-70W-5100lm (5700K)  
LIKO Omega K-70W Floodlight

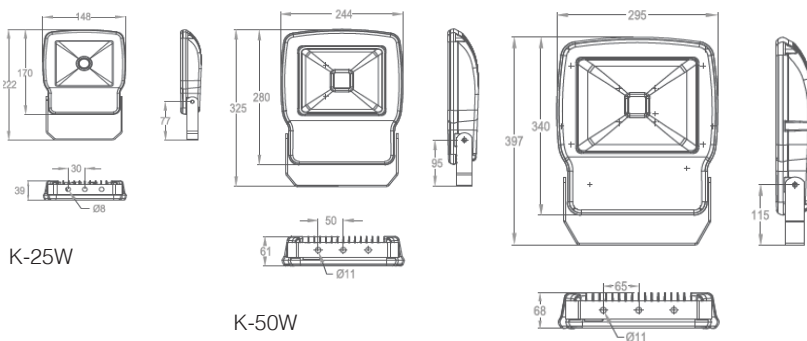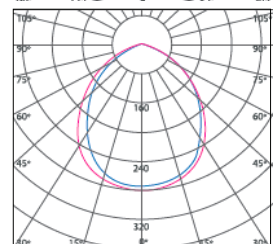

### Application:

Parking areas, facade lightings, sport lightings, commercial areas, residential areas & shopping malls.